



CATALOGUE PRODUCT PT LINTAS SAGARA BIRU

MAIN DISTRIBUTOR **DEWELD**

- HARDWARE MARINE OFFSHORE
- TOOLS EQUIPMENT SAFETY

PT. LINTAS SAGARA BIRU


PT Lintas Sagara Biru is located in Batam industrial area - Indonesian country, close to Singapore and Malaysia country. The company provide a wide range of products such as welding equipment, welding consumable products, power tools machine and accessories, construction safety products, electrical, hardware, various hose and many other products. Established in 2008, Company has owns strong team sales marketing and rich experience. Thus, we could assure our customer of high quality products as well as good repulation. Because customer satisfaction is very important for us.

Holding the management Vision “Honesty and Quality” we maintain stable cooperative relations with our clients and gain trust of our clients. Our company supplies different kind of products with high quality and favorable price. We’re bleased to get your inquiry and will reply soon. We stick to our principle of “Quality Firts, Service First” continues improvement and innovation to meet the customers

OUR BRAND



Galvanise Chain

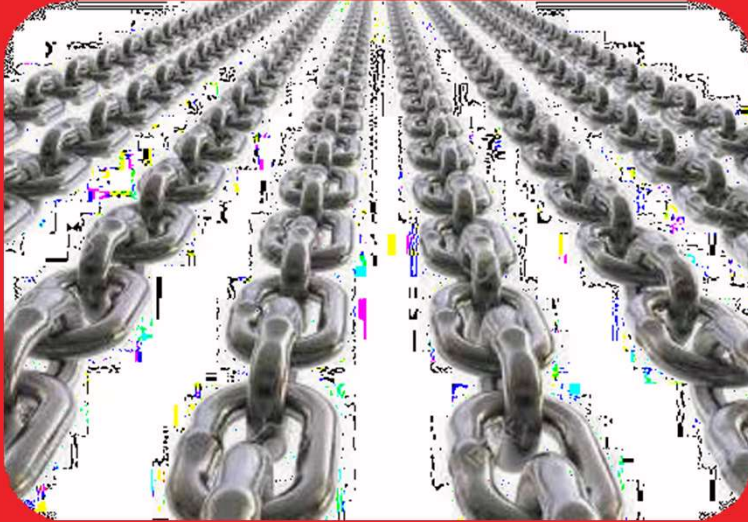

Size Galvanise Chain :

(10mm) 3/8" x 60 Meter
(12.5mm) 1/2" x 60 Meter
(16mm) 5/8" x 60 Meter
(20mm) 3/4" x 60 Meter
(22mm) 7/8" x 30 Meter
(25mm) 1" x 30 Meter

Brand : Deweld



Shackle Screw Pin G-209



Shackle Bolt +Nut G-2130



Shackle Bolt +Nut G-2150



Shackle Screw Pin G-210



- 4.75 Ton x 3/4"
- 6.5 Ton x 7/8"
- 8.5 Ton x 1"
- 12 Ton x 1-1/4"
- 17 Ton x 1-1/2"
- 25 Ton x 1-3/4"
- 35 Ton x 2"
- 55 Ton x 2-1/2"
- 85 Ton



D-Shackle

Specifications

D-Shackle Type Size :

Material Galvanise :

1/2", 3/4", 3/8", 5/8", 7/8", 1"

Material Stainless Steel :

1/2", 1/4", 1/8", 3/4", 3/8", 5/8", 5/16",
7/8", 1"



TurnBuckle

Specifications

Turnbuckle Type :

Eye & Eye

Hok & Hok

Jaw & Eye

Jaw & Jaw



Wire Rope Clip

Specifications :

Material : Galvanise & Stainless Steel

Wire Rope Clip Size :

3mm, 5mm, 6mm

8mm, 10mm, 12mm

16mm, 20mm, 24mm

26mm, 28mm, 30mm


32mm, 34mm, 40mm

Stockless Anchor



Type: Hall Anchor

Anchor Chain



Chain Diameter	Weight	Material
1/2"	1.5	Q235
3/4"	2.5	Q235
1"	4.0	Q235
1 1/4"	7.0	Q235
1 1/2"	10.0	Q235
2"	18.0	Q235
2 1/2"	30.0	Q235
3"	45.0	Q235
3 1/2"	65.0	Q235
4"	90.0	Q235
4 1/2"	120.0	Q235
5"	150.0	Q235
5 1/2"	190.0	Q235
6"	240.0	Q235
6 1/2"	300.0	Q235
7"	360.0	Q235
7 1/2"	430.0	Q235
8"	500.0	Q235
8 1/2"	580.0	Q235
9"	660.0	Q235
9 1/2"	750.0	Q235
10"	840.0	Q235
10 1/2"	940.0	Q235
11"	1040.0	Q235
11 1/2"	1150.0	Q235
12"	1260.0	Q235
12 1/2"	1380.0	Q235
13"	1500.0	Q235
13 1/2"	1630.0	Q235
14"	1760.0	Q235
14 1/2"	1900.0	Q235
15"	2040.0	Q235
15 1/2"	2190.0	Q235
16"	2340.0	Q235
16 1/2"	2500.0	Q235
17"	2660.0	Q235
17 1/2"	2830.0	Q235
18"	3000.0	Q235
18 1/2"	3180.0	Q235
19"	3360.0	Q235
19 1/2"	3550.0	Q235
20"	3740.0	Q235
20 1/2"	3940.0	Q235
21"	4140.0	Q235
21 1/2"	4350.0	Q235
22"	4560.0	Q235
22 1/2"	4780.0	Q235
23"	5000.0	Q235
23 1/2"	5230.0	Q235
24"	5460.0	Q235
24 1/2"	5700.0	Q235
25"	5940.0	Q235
25 1/2"	6190.0	Q235
26"	6440.0	Q235
26 1/2"	6700.0	Q235
27"	6960.0	Q235
27 1/2"	7230.0	Q235
28"	7500.0	Q235
28 1/2"	7780.0	Q235
29"	8060.0	Q235
29 1/2"	8360.0	Q235
30"	8660.0	Q235
30 1/2"	8970.0	Q235
31"	9280.0	Q235
31 1/2"	9600.0	Q235
32"	9920.0	Q235
32 1/2"	10260.0	Q235
33"	10520.0	Q235
33 1/2"	10800.0	Q235
34"	11080.0	Q235
34 1/2"	11380.0	Q235
35"	11680.0	Q235
35 1/2"	12000.0	Q235
36"	12320.0	Q235
36 1/2"	12660.0	Q235
37"	13000.0	Q235
37 1/2"	13360.0	Q235
38"	13720.0	Q235
38 1/2"	14100.0	Q235
39"	14480.0	Q235
39 1/2"	14860.0	Q235
40"	15240.0	Q235
40 1/2"	15640.0	Q235
41"	16040.0	Q235
41 1/2"	16460.0	Q235
42"	16880.0	Q235
42 1/2"	17320.0	Q235
43"	17700.0	Q235
43 1/2"	18180.0	Q235
44"	18580.0	Q235
44 1/2"	19080.0	Q235
45"	19500.0	Q235
45 1/2"	19960.0	Q235
46"	20440.0	Q235
46 1/2"	20940.0	Q235
47"	21440.0	Q235
47 1/2"	21960.0	Q235
48"	22480.0	Q235
48 1/2"	23020.0	Q235
49"	23580.0	Q235
49 1/2"	24100.0	Q235
50"	24680.0	Q235
50 1/2"	25200.0	Q235
51"	25800.0	Q235
51 1/2"	26420.0	Q235
52"	27040.0	Q235
52 1/2"	27680.0	Q235
53"	28320.0	Q235
53 1/2"	29000.0	Q235
54"	29640.0	Q235
54 1/2"	30280.0	Q235
55"	30960.0	Q235
55 1/2"	31600.0	Q235
56"	32320.0	Q235
56 1/2"	33000.0	Q235
57"	33680.0	Q235
57 1/2"	34440.0	Q235
58"	34880.0	Q235
58 1/2"	35920.0	Q235
59"	36400.0	Q235
59 1/2"	37440.0	Q235
60"	37960.0	Q235
60 1/2"	39000.0	Q235
61"	39560.0	Q235
61 1/2"	40600.0	Q235
62"	41160.0	Q235
62 1/2"	42280.0	Q235
63"	42880.0	Q235
63 1/2"	43960.0	Q235
64"	44640.0	Q235
64 1/2"	45800.0	Q235
65"	46480.0	Q235
65 1/2"	47600.0	Q235
66"	48320.0	Q235
66 1/2"	49400.0	Q235
67"	50080.0	Q235
67 1/2"	51200.0	Q235
68"	51960.0	Q235
68 1/2"	53000.0	Q235
69"	53800.0	Q235
69 1/2"	54800.0	Q235
70"	55600.0	Q235
70 1/2"	56600.0	Q235
71"	57400.0	Q235
71 1/2"	58400.0	Q235
72"	59200.0	Q235
72 1/2"	60200.0	Q235
73"	61000.0	Q235
73 1/2"	62000.0	Q235
74"	62800.0	Q235
74 1/2"	63800.0	Q235
75"	64600.0	Q235
75 1/2"	65600.0	Q235
76"	66400.0	Q235
76 1/2"	67400.0	Q235
77"	68200.0	Q235
77 1/2"	69200.0	Q235
78"	70000.0	Q235
78 1/2"	70800.0	Q235
79"	71600.0	Q235
79 1/2"	72400.0	Q235
80"	73200.0	Q235
80 1/2"	74000.0	Q235
81"	74800.0	Q235
81 1/2"	75600.0	Q235
82"	76400.0	Q235
82 1/2"	77200.0	Q235
83"	78000.0	Q235
83 1/2"	78800.0	Q235
84"	79600.0	Q235
84 1/2"	80400.0	Q235
85"	81200.0	Q235
85 1/2"	82000.0	Q235
86"	82800.0	Q235
86 1/2"	83600.0	Q235
87"	84400.0	Q235
87 1/2"	85200.0	Q235
88"	86000.0	Q235
88 1/2"	86800.0	Q235
89"	87600.0	Q235
89 1/2"	88400.0	Q235
90"	89200.0	Q235
90 1/2"	90000.0	Q235
91"	90800.0	Q235
91 1/2"	91600.0	Q235
92"	92400.0	Q235
92 1/2"	93200.0	Q235
93"	94000.0	Q235
93 1/2"	94800.0	Q235
94"	95600.0	Q235
94 1/2"	96400.0	Q235
95"	97200.0	Q235
95 1/2"	98000.0	Q235
96"	98800.0	Q235
96 1/2"	100000.0	Q235
97"	101600.0	Q235
97 1/2"	102800.0	Q235
98"	105600.0	Q235
98 1/2"	106000.0	Q235
99"	109200.0	Q235
99 1/2"	110000.0	Q235
100"	113600.0	Q235
100 1/2"	114800.0	Q235
101"	118400.0	Q235
101 1/2"	120000.0	Q235
102"	123200.0	Q235
102 1/2"	124000.0	Q235
103"	127200.0	Q235
103 1/2"	128000.0	Q235
104"	131200.0	Q235
104 1/2"	132000.0	Q235
105"	135600.0	Q235
105 1/2"	136000.0	Q235
106"	140000.0	Q235
106 1/2"	140000.0	Q235
107"	144800.0	Q235
107 1/2"	144000.0	Q235
108"	149600.0	Q235
108 1/2"	148000.0	Q235
109"	154400.0	Q235
109 1/2"	152000.0	Q235
110"	159200.0	Q235
110 1/2"	156000.0	Q235
111"	164000.0	Q235
111 1/2"	160000.0	Q235
112"	168800.0	Q235
112 1/2"	164000.0	Q235
113"	173600.0	Q235
113 1/2"	168000.0	Q235
114"	178400.0	Q235
114 1/2"	172000.0	Q235
115"	183200.0	Q235
115 1/2"	176000.0	Q235
116"	188000.0	Q235
116 1/2"	180000.0	Q235
117"	192800.0	Q235
117 1/2"	184000.0	Q235
118"	197600.0	Q235
118 1/2"	188000.0	Q235
119"	202400.0	Q235
119 1/2"	192000.0	Q235
120"	207200.0	Q235
120 1/2"	196000.0	Q235
121"	212000.0	Q235
121 1/2"	200000.0	Q235
122"	216800.0	Q235
122 1/2"	204000.0	Q235
123"	221600.0	Q235
123 1/2"	208000.0	Q235
124"	226400.0	Q235
124 1/2"	212000.0	Q235
125"	231200.0	Q235
125 1/2"	216000.0	Q235
126"	236000.0	Q235
126 1/2"	220000.0	Q235
127"	240800.0	Q235
127 1/2"	224000.0	Q235
128"	245600.0	Q235
128 1/2"	228000.0	Q235
129"	250400.0	Q235
129 1/2"	232000.0	Q235
130"	255200.0	Q235
130 1/2"	236000.0	Q235
131"	260000.0	Q235
131 1/2"	240000.0	Q235
132"	264800.0	Q235
132 1/2"	244000.0	Q235
133"	269600.0	Q235
133 1/2"	248000.0	Q235
134"	274400.0	Q235
134 1/2"	252000.0	Q235
135"	279200.0	Q235
135 1/2"	256000.0	Q235
136"	284000.0	Q235
136 1/2"	260000.0	Q235
137"	288800.0	Q235
137 1/2"	264000.0	Q235
138"	293600.0	Q235
138 1/2"	268000.0	Q235
139"	298400.0	Q235
139 1/2"	272000.0	Q235
140"	303200.0	Q235
140 1/2"	276000.0	Q235
141"	308000.0	Q235
141 1/2"	280000.0	Q235
142"	312800.0	Q235
142 1/2"	284000.0	Q235
143"	317600.0	Q235
143 1/2"	288000.0	Q235
144"	322400.0	Q235
144 1/2"	292000.0	Q235
145"	327200.0	Q235
145 1/2"	296000.0	Q235
146"	332000.0	Q235
146 1/2"	300000.0	Q235
147"	336800.0	Q235
147 1/2"	304000.0	Q235
148"	341600.0	Q235
148 1/2"	308000.0	Q235
149"	346400.0	Q235
149 1/2"	312000.0	Q235
150"	351200.0	Q235
150 1/2"	316000.0	Q235
151"	356000.0	Q235
151 1/2"	320000.0	Q235
152"	360800.0	Q235
152 1/2"	324000.0	Q235
153"	365600.0	Q235
153 1/2"	328000.0	Q235
154"	370400.0	Q235
154 1/2"	332000.0	Q235
155"	375200.0	Q235
155 1/2"	336000.0	Q235
156"	380000.0	Q235
156 1/2"	340000.0	Q235
157"	384800.0	Q235
157 1/2"	344000.0	Q235
158"	389600.0	Q235
158 1/2"	348000.0	Q235
159"	394400.0	Q235
159 1/2"	352000.0	Q235
160"	399200.0	Q235
160 1/2"	356000.0	Q235
161"	404000.0	Q235
161 1/2"	360000.0	Q235
162"	408800.0	Q235
162 1/2"	364000.0	Q235
163"	413600.0	Q235
163 1/2"	368000.0	Q235
164"	418400.0	Q235
164 1/2"	372000.0	Q235
165"	423200.0	Q235
165 1/2"	376000.0	Q235
166"	428000.0	Q235
166 1/2"	380000.0	Q235
167"	432800.0	Q235
167 1/2"	384000.0	Q235
168"	437600.0	Q235
168 1/2"	388000.0	Q235
169"	442400.0	Q235
169 1/2"	392000.0	Q235
170"	447200.0	Q235
170 1/2"	396000.0	Q235
171"	452000.0	Q235
171 1/2"	400000.0	Q235
172"	456800.0	Q235
172 1/2"	404000.0	Q235
173"	461600.0	Q235
173 1/2"	408000.0	Q235
174"	466400.0	Q235
174 1/2"	412000.0</	



Anchor Shackle

Anchor Shackle Type : 3/16" - 2-1/2"



Kenter Shackle

Type " 17.5MM -120MM
Material : Alloy Steel



Square Swivel Shackle

Specifications

Type : Swivel Square type B can be used to fit directly onto the shank of anchor or connected to crown shackles of the anchor



Swivel Anchor Chain

Specifications

Anchor chain swivel forerunner consists of a swivel, common links and end link. It is applicable to grade2 and grade3 anchor chains.

Type Size : 12.5mm - 162mm



Round Swivel Shackle

Type of Round Swivel Shackle :

- Regular Swivel G-402
- Chain Swivel G-401
- Jaw End Swivel G-403
- Eye & Eye Swivel

Wire Rope Hand Hoists Alum

Aluminium Type :
Capacity : 0.8T - 5.4T
Brand : Kawasaki



Wire Rope

Material : Galvanise & Stainless Steel
Capacity : 0.8T - 3.2T
Brand : Kawasaki



Chain Block



Type Size :

0,5 Ton x 3Meter
1 Ton x 3Meter
1,5 Ton x 3Meter
2 Ton x 3Meter

3 Ton x 3Meter
5Ton x 3Meter
10 Ton x 5Meter
20 Ton x 10Meter



Mini Chain Block

Type Size : 0,25 Ton x 4 Meter

Lever Block



Power Source : Hand Chain

Lift Speed : Manual

Type Size :

1 Ton x 1,5 Meter

1,5 Ton x 1,5 Meter

2 Ton x 1,5 Meter

3 Ton x 1,5 Meter

6 Ton x 1,5 Meter

Lever Block (Spare Parts)



Type :

Main Bevel

Main Circle

Main Pinion

Bearing

Housing Gear Jack

Horizontal Lifting Clamp



Specifications

Capacity : 1 Ton - 3 Ton

Vertical Lifting Clamp



Specifications

Type Size :

1 Ton , 2 Ton , 3 Ton , 4 Ton , 5 Ton



Ratchet Puler

Specifications

Type Size : 1Ton, 1.5Ton , 2Ton

Brand : Kawasaki



Hand Puller

Specifications

Capacity (Ton) : 2Ton

Power Source : Hand / Manual

Brand : Kawasaki



Heavy Duty Cable Puller

Specifications

Capacity : 0.34T - 1.8Ton

Brand : Kawasaki



Ratchet Belt Tie Down

Specifications

Type Size :

1" x 5Meter

1-1/2" x 10Meter

2" x 10Meter

2" x 12Meter

2" x 1Meter

3" x 12meter

4" x 12Meter

5" x 5Meter

Brand : Kawasaki



Webbing Sling

Specifications

Type Size :

1 Ton x 2Meter 3Ton x 5Meter

1 Ton x 4Meter 3Ton x 6Meter

2 Ton x 2Meter 4Ton x 4Meter

2 Ton x 3Meter 4Ton x 6Meter

2 Ton x 5Meter 5Ton x 4Meter

2 Ton x 5Meter 4Ton x 6Meter

2 Ton x 6Meter 6Ton x 4Meter

3 Ton x 3Meter 6Ton x 6Meter

3 Ton x 4Meter 6Ton x 8Meter

Brand : Kawasaki



Pallet Truck

Heavy duty Pump

Compliance with machinery directive

Frame Material : STEEL

Capacity Kg : 2000, 3000, 4000, 5000

Brand : Kawasaki

Hand-Type

Mechanical Jack

Specifications

Capacity : 1,5Ton - 25Ton

Brand : Kawasaki





Pallet Clamp

specifications

Capacity (Lbs) : 2000

Brand : Kawasaki



Ratchet / Lever Type Load Binder

specifications

Application : Cargo Control

Type Size :

● 1/4" - 5/16" ● 5/16" - 3/8" ● 3/8" - 1/2" ● 1/2" - 5/8"

Brand : Kawasaki



Lever Winch

specifications

Capacity : 1T - 3Ton

Power Source : Hand

Brand : Kawasaki



Bottle Jack

Specifications

Type Size : 2Ton, 5Ton, 10Ton, 20Ton
Brand : Masada & Kawasaki



Gear Jack

Specifications

Type Size : 32 Ton, 50 Ton, 100 Ton
Brand : Nitto & Kawasaki



Gear Jack (Spare Parts)

Type :

Main Bevel
Main Circle
Main Pinion
Bearing & Housing Gear Jack

Brand : Nitto & Kawasaki



Electrical Trolley

Specifications

Type : Hoist Trolley
Capacity : 0,5Ton, 1Ton, 2Ton, 3Ton, 5Ton

Brand : Kawasaki



Geared Trolley

Specifications

Capacity (Ton) : 1Ton - 10 Ton
Brand : Kawasaki



Electric Chain Block

Type Sling : Chain

Lifting Height : 3M

Lifting Capacity : 0,5T - 5T

Working Voltage :

3P/200V - 600V



Rubber Sheet Or Rubber Sheet with Fibre Insertion

Specifications

Weight: +/- 50 Kg
Rubber Sheet Size:
1mm x 1.2Meter
2mm x 1.2Meter
3mm x 1.2Meter
4mm x 1.2Meter
5mm x 1.2Meter
6mm x 1.2Meter
8mm x 1.2Meter
10mm x 1.2Meter

Size Rubber Sheet with Fibre Insertion : 2mm, 3mm, 4mm, 5mm,6mm, 10mm

Brand : DeWeld



Neopreme Rubber Gasket

Specifications

Type size :
2mm x 1,2Meter x 10Meter
3mm x 1.2Meter x 10Meter
4mm x 1.2Meter x 10Meter
5mm x 1.2Meter x 10Meter
6mm x 1.2Meter x 10Meter

Brand : DeWeld



Rubber Sponge (Door)

Specifications

Type Size :
1" x 2"
1" x 1-1/2"
1" x 1-1/4"
3/4" x 1-1/2"
3/4" x 1-1/4"
3/4" x 1-3/4"
3/4" x 2"
3/8" x 1-1/2"
5/8" x 1-1/2"
2" x 1-1/2"
1-1/4" x 1-1/4"

Lenght: 1 roll : 30 Meter

Brand : DeWeld



Black Stud Rubber Mat

Specifications

Type Size : 4,5MM x 1M x 10M

Brand : Deweld



Rubber Gasket Full Face

Specifications

Type : JIS 5K, JIS10k, PN 10K, PN 16K, ANSI 150
 - Full Face
 - Available On Request
 - Material EPDM & Non Asbestos
 - Other Material Available on request.



Red Gasket or Packing Red

Specifications

Type Size :
 0.8MM x 1M x 1.5M 2.0MM x 1M x 1.5M
 1.0MM x 1M x 1.5M 3.0MM x 1M x 1.5M
 1.5MM x 1M x 1.5M 5.0MM x 1M x 1.5M

Brand : Klingit



Black Asbestos Gasket with Wire

Specifications

Type Size :
 1MM x 1000MM x 1500MM
 2MM x 1000MM x 1500MM
 3MM x 1000MM x 1500MM



Non Asbestos Gasket Specifications

Type Size :
 0.5MM x 1270 x 1270MM 2.0MM x 1270 x 1270MM
 0.8MM x 1270 x 1270MM 2.0MM x 1,5 x 1,5MM
 1.0MM x 1270 x 1270MM 3.0MM x 1000 x 1500MM
 1.0MM x 1,5 x 1,5MM 3.0MM x 1,5 x 1,5MM
 1.5MM x 1270 x 1270MM 3.0MM x 1270 x 1270MM

Brand : TOMBO



Gland Packing

Specifications

Type : Gland Packing Pure PTFE / Gland Packing Pure PTFE GREASE

Size : 5mm, 6mm, 8mm, 10mm, 12mm, 16mm, 20mm, 22mm, 25mm, 26mm, 35mm

Packing : 5kg /Roll



Asbestos Tape

Specifications

Type Size :
 (2") 3mm x 50mm
 (3") 3mm x 76mm
 (4") 3mm x 100mm

Weight : 1 Roll : 5kg

Packing : 10Roll / Bundle



Fire Blanket HT-800

Specifications

Type : Fire Blanket HT-800 1mm x 50Meter

Packing : 1Roll / Ctn

Brand : DeWeld



Brake Lining

Specifications

Type Size :
 (10mm) 3/8" x 3"
 (10mm) 3/8" x 4"



Airless Pump 63:4



Airless Pump 45:1



King Airless Sprayer
Brand : Graco



Merkur Airless Sprayer
Brand : Graco



XTREME Z45 & Z25
Brand : Graco



Blasting Pot

Specifications

Type : Blasting Pot 600 Lbs

Brand : Spedoo



E-Xtreme Electric Airless Sprayer
Brand : Graco



Airless pump 68:1



S-Plus Gun

Type : S-Plus Gun C/W Tip 2569517
Brand : Graco



Spray Gun

Brand : Graco



Spray Gun F75

Brand : Native



Aluminium Nozzle Holder

Type Size : 1-1/4"



Blasting Nozzle

Blasting Nozzle Type : No. 6, 7, 8
Rubber Coupling Type : 1-1/4", 3/4"



Nylon Nozzle Holder

Type Size : 1" . 1-1/4"



Swivel Gun

Swivel Joint for Airless Paint Sprayer,
connect Gun and Hose.



Swivel Pol Gun Kit

Type : Swivel Angle
Spray Nozzle

Sandblasting (Helmet - Jacket)





Pop Up Valve

Specifications

Type : Rubber Pop Up Valve and Rubber O-Ring
used to automatically seal a blast pot once it is pressurized.



Chicago Hose End

Specifications

Chicago Hose End
Type Size : 1", 1-1/4", 1/2", 3/4", 3/8"



Aluminum Coupling

Specifications

Coupler Q2L Type Size : 1", 1-1/4"



Blasting Coupling

Specifications

Type Size : 1-1/4", 2"
Male (Drat Luar)
Female (Drat Dalam)



Filter Tip

Specifications

Type Size : M60 , M100

Mini Dehumidifier (DH)



Other characteristics : Outdoor , Compact

Heat Output : 6.000 W - 16.000W



Pole Gun

Type Size : 3 Feet & 6 Feet

Brand : Flotech and Graco

Spray Tip

Type Size :

313, 315, 317, 319,
413, 417, 419, 421,
517, 519, 521, 523,
527, 621, 631

Brand : Graco

Graco Repair Kit

Type : Graco Xtreme Seal Repair Kit
(Replace 24F963) P/N 25D238

Brand : Graco

Repair Kit pole Gun

Type : G218070

Brand : Graco

Switch Tip

Type Size : 421, 517

Brand : Graco



PVC Air House



Type :

1/4" 5/16" 3/8" 1/2" 3/4" 1"
Colour : Yellow & Black

Paint Hose (Red Colour)



Type Size :

Paint Hose 1/4" x 50FT c/w
NPT Fitting 10.000PSI

Brand : HENPRO

Paint Hose (Blue Colour)



Type :

Henpro 1/4" x 50FT c/w NPT Fitting 7.250PSI
Graco 1/4" x 50FT c/w NPT Fitting 3.300PSI



Paint Hose (Red Colour)

specifications

Type Size :
1" x 30meter
1-1/4" x 40meter
Brand : Extreme



Glass Paper

specifications

Packing :
50Pcs / Roll
72Roll / Ctn



Mega Check

Specifications

Type :
Mega Check Penetrat
Mega Check Developer
Mega Check Cleaner / Treatment
Packing : 20can / Doz

Brand : Nabakem



Tapping Compound

Specifications

Type size : Cutting Fluid TC-1

Brand : Nabakem



Thinner

Specifications

Type : 3,5 Liter - 18Liter
Paint Thinner can be used to clean your
Equipment and Tools.

Brand : Kangaroo



Adhesive

Specifications

Type : 1 Liter - 4 Liter
- A multipose industrial contact adhesive ,
suitable for bonding surface such as wood,
cork, rubber and leather, etc.

Brand : Kangaroo



Belzona 1111

Specifications

Application for Belzona 111
Repair of cracks and on engine and pump casings,
tanks and other equipment high strength
structural adhesive for metal bonding



Anti Rush WD40

Specifications

WD-40

Multi-Use Product protects metal from rust and
corrosion, penetrates stuck parts, displaces
moisture and lubricates almost anything.



Mig Gel

Specifications

During the welding, the welding nozzle usually
clogged by the spatters, so, when using this
agent, it can soothe the welding nozzle.



Silicon Sealent

Specifications

Colour : White & Black

Brand : X-traseal & V-tech



Regulator Argon

Specifications
Brand : Titan



Regulator CO2 Without Heater

Specifications
Brand : Titan



Regulator CO2

Specifications
Type : Regulator CO2 220 Volt




Regulator Oxygen

Specifications
Type : YR -76
Packing : 24Pcs / Ctn
Brand : YAMATO



Regulator LPG

Specifications
Type : YR -71
Packing : 24Pcs / Ctn
Brand : YAMATO



Regulator acetylene

Specifications
Type : YR -71
Packing : 24Pcs / Ctn
Brand : YAMATO



Electrode Holder

Specifications
Type : 500Amp
Packing : 50Pcs / Ctn
Brand : DeWeld



Cutting Nozzle

Type : ANME / PNME
Size : 1/16", 1/32", 1/8", 3/32", 3/64", 5/64"
Packing : 50Pcs / Box , 4Box / Can
Brand : Yamato



Twin Hose

Specifications
Type : 1/4" (80Meter - 90Meter)
Brand : DeWeld



Cutting Torch MK-100

Specifications
Type : MK - 100
Brand : Koike



Cutting Torch

Specifications
Packing : 10Pcs / Ctn
Brand : YAMATO



PIPE CUTTING MACHINE

Model : CG2-11G

Specifications :

- The Main Body is made of aluminium alloy, light and portable
- applied to boiler making, oil production and chemical factory, etc.


Cutting Machine CW Track CGI-30

specifications

Type Model : CG1 -30

Holder Trail Track Included :
1.8M x 8.5"

Application : For Shipbuilding,
Oil production, Metal structure
and other .

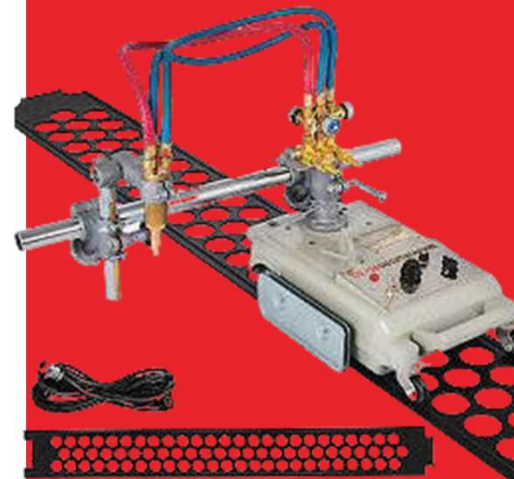

Flashback Arrestor

specifications

Type Size : 188 - 288

188 Acetylene & Oxygen (Torch)

288 Acetylene & Oxygen (Regulator)

Brand : Deweld



Y Connector or 2 Way Connector

specifications

Type Size : Acetylene & Oxygen

Brand : DeWeld & Yamato



Cable Connector

specifications

Type Size : Male & Female

Packing :

2Pcs / Box

25Box / Ctn



Gouging Torch Welding Torch

specifications

Type : MK-3, K-4



GOUGING INSULATOR

specifications

Type Size : Spare Upper & Lower
Insulator For Gouging Torch K-4



Liner - Mig Gun

specifications

Mig Gun Type :

350Amp - 500Amp

Liner For Mig Gun Type :

350Amp - 500Amp

(4.5mm- 5.5mm)



Cutting Nozzle Koike

specifications

Type : Cutting Nozzle KOIKE
2 Bar , 3 Bar , 4 Bar , 5 Bar



Swan Neck

specifications

Type Size : 350Amp



Chipping Hammer

specifications

Type Size : 300Gram - 500Gram



Cable Connector

specifications

Type Size : Male & Female
Packing :
2Pcs / Box
25Box / Ctn



Carbon Gouging

specifications

Type Size :
6.5mm, 8.0mm, 9.5mm, 12.0mm
Brand : DeWeld



Gas Nozzle

specifications

Type Size :
OTC 350Amp - 500Amp



Isolator

specifications

Type :
OTC 350 - 500AMP



Contact Tip mig ,Collect, Collect Body

specifications

Type Size : 1.2mm, 1.6mm
2.4mm, 3.2mm

Joint - Nipple Hose Connector

specifications

Type Nipple Hose Connector : Acetylene & Oxygen
Type Size Joint Hose : 1/4"
Type Size Y Joint Hose : 1/4"





Otiker - Hose Clamp

specifications

Type Size Otiker Clmap : 11-13, 13-15, 15-18

Type Size Hose Clamp :

5/8", 3/4", 1/2"

1", 1-1/2", 1-3/4", 2"

2-1/2", 2-1/4", 3"

3-1/2", 4", 5-1/2", 6"



ceramic gas diffuser - Alumina Cup

specifications

Type : Ceramic Gas Diffuser 500Amp

Type : Alumina Cup : No. 4, 5, 6, 7, 8, 9



Tungsten Electrode

specifications

Type Size : 1.6mm x 150mm
2.4mm x 150mm
3.2mm x 150mm



Tip Cleaner

specifications

Type Size : Box / Waken



Clear Lens - Dark Lens

specifications

Type Size :

Dark Lens	105 x 50 x 3.0	400Pcs/ Ctn
No. 10, 11, 12		
Clear Lens	105 x 50 x 1.5	500Pcs/ Ctn



Back Up

specifications

Type : Short - Long

GEMINI Welding Electrode 308L - 309L-136L

specifications

Type Size :

Gemini 308L - 309L - 316L x 2.6mm x 1kg
Gemini 308L - 309L - 316L x 3.2mm x 1kg
Gemini 308L - 309L - 316L x 4.0mm x 1kg

Packing : 1kg/ Box - 20Box / Ctn

Application : depositing weld metal suitable for welding stainless steel, leaving a very smooth weld with a clean edge.



Welding Electrode

specifications

Type :

Welding Electrode " Golden Bridge" 6013 - 7018

Size : 2.5mm, 3.2mm, 4.0mm, 5.0mm

Brand : "GOLDEN BRIDGE"



GEMINI Cast Iron Electrode Ni55

specifications

Gemini Cast Iron Ni55

Weld metal designed specially for strength welding

Type Size : 2.6mm - 3.2mm



Welding Electrode RB

specifications

Type : RB -26, LB52, LB52U

Size : 2.6MM, 3.2MM, 4.0MM

Brand : Kobelco





Grinding Disc

specifications

Type Size : Grinding Disc
4" (100 x 6 x 16mm)
5" (125x 6 x 22mm)
7" (180 x 6 x 22mm)

Type Size : Grinding Flexible Disc
4" (100 x 3 x 16mm)

Brand : deweld & Licon



Cutting Disc

specifications

Type Size :
4" (100 x 1.2 x 16mm)
4" (100 x 2.5 x 16mm)
5" (125 x 3 x 22mm)
7" (180 x 3 x 22mm)
14" (355 x 3 x 25,4mm)
16" (400 x 3 x 25,4mm)

Brand : DeWeld & Licon



Flap Disc Metal

specifications

Type Size :
4" (100 x 16 #60)
4" (100 x 16 #80)
4" (100 x 16 #100)
7" (100 x 22 #80)
Packing : 200Pcs / Box

Brand : DeWeld



Flap Disc Stainless Steel

specifications

Type Size :
Flap Disc 100 x 16 #60 Stainless Steel
Flap Disc 100 x 16 #80 Stainless Steel
Flap Disc 180 x 22 #80 Stainless Steel
Packing : 200Pcs / Box

Brand : Deweld



Bevel Brush Flat Wire Brush

specifications

Type Size : 4"
Packing : 100Pcs / Ctn

Brand : deweld



Bevel Brush

specifications

Type Size : 4"
Packing : 100Pcs/ Ctn

Brand : Yamato



Twisted Cup Brush

specifications

Type Size : 3"
Packing : 100Pcs / Ctn
Application: For cleaning rust,
removing paint or cleaning surfaces

Brand : Deweld



Cup Brush

specifications

Type Size : 3"
Packing : 100Pcs / Ctn
Application: Removal of rust, paint or
any kind of adherence.Cleaning
of castings.

Brand : DeWeld



Cup Brush

specifications

Type Size :
(4") #24, #36, #60, #80, #100
(6") #36, #60, #80

Application : For the purpose of something,
Remove a layer of material , or
something make the surface rougher



Mounted Stone

specifications

Mounted Point :

A1, A2, A3, A4, A5, A11, A12, A15

Raw Material : Pink Aluminium Oxide

Brand : Deweld



Abrasive Paper

specifications

Sandpaper is used to remove small amount of material from surfaces, for the purpose of smoothing, remove a layer of material.

Grit Size : #60 - #2000



End Brush

specifications

Type Size : 1"

Packing : 1000Pcs / Ctn

Application : Removal of edges, scale, paint, Rust, Rubber-Metal Pieces, etc.

Material : Stainless Steel & Metal

Brand : Deweld



Abrasive Roll

specifications

Application: Sandpaper is used to remove small amount of material from surfaces, for the purpose of smoothing, remove 7a layer of material.

Grit Size : 80, 120, 180 240



Hand Wire Brush Metal

specifications

Welding : cleaning and scale removal & Removal of rust



Hand Wire Brush

specifications

Type : 5 Lines - 6 Lines



Flap Wheel Klingspor

specifications

Type : G80 @10Pcs / Box



Coconut Hand Broom

specifications

Packing : 100Pcs/ Ctn



Mini Brush Red

specifications

Type Size : Mini Red Brush 9"
Packing : 12Pcs / Box



Paint Brush

specifications

Type Size : 1" - 4"
Packing : 12Pcs / Ctn



Handle - Roller Paint Refill

specifications

Roller Handle & Roller
Paint Refill Type Size : 4" , 7"



Measuring Tape

specifications

Type Size : 3Meter - 50Meter



Type Size : 125 x 12 x 5mm
Packing :
100Pcs/ Box
10Box / Ctn

Brand : DeWeld



specifications

Colour Type : White , Yellow , Blue, Red
Packing :
12Pcs/ Box
9Box / Ctn

Brand : Markal



Marking Chalk

specifications

Colour Type : White , Yellow,
Red, Green.
Temporarily mark on lumber ,
metal and pavement.

Brand : Penguin



Paint Marker

specifications

Colour Type : White , Yellow, Red, Blue

Brand : Toyo

Blower Pipe

Specifications

Type Size : 12" x 15Meter

Blower Fan Blade

Specifications

Type Size : 8", 10", 12"

Blower Fan

Specifications

Type Size : 8", 10", 12"





Multiple Outlet Socket

specifications
Type Size :
3 x 16A / 110Volt9
3 X 16A / 220Volt

Brand : VISTAR



Industrial Plug & Socket

specifications

Type Industrial Plug:
3 pin x 16Amp
4 pin x 32Amp

Type Industrial Socket:
3 pin x 16Amp
4 pin x 32Amp
Packing : 10 Pcs / Ctn

Brand : VISTAR



Solder Gun

specifications

Type Gun : Power Corded



Multi Tester

specifications

Type :
Multi Tester YX-360
Multi Tester CD - 800



Cable Lug

specifications

Type Size:
4-16, 35-12
70-10, 70-12
95-12, - 150-12

Brand : Visalux



Cable Link

specifications

Type Size :
50mm, 70mm, 95mm, 120mm

Brand : Visalux



Hand Lamp

specifications

Voltage : 24V/ 220V
Power : 25W - 100W
Packing : 30Pcs / Ctn



Bulb Lampmp

specifications

Type :
60 Watt 110-220 Volt
100 Watt 110-220Volt



Metal Halide Tube

specifications

Lamp Wattage :400 - 1000watts
Clear Light Bulbs

Brand : Philips / Visalux



Tes Pen

specifications

Type:
3,5 x140mm

Brand : visalux / Philips



Plastic Roll Film or Plastic Stretch Film

specifications

Type Size : 1.5Kg - 2Kg
Packing : 1 Box , 6Pcs



Jumbo Bag

specifications

Type Size : 1Ton - 2Ton



Sounding Tape

specifications

Sounding Tape s/s
Type Size : 10Meter, 15Meter, 20Meter, 30Meter
Brand : RICHTER



PVC Cable

specifications

Type :

PVC Cable 3c x 40 x 100 yard

PVC Cable 3c x 70 x 25 yard

PVC Cable 3c x 70 x 100 yard Full Cooper

PVC Cable 3c x 110 x 100 yard Full Cooper



Neoprema Cable

specifications

Rubber Neoprene Cable

Type Size :

2c x 1.5mm - 2.5mm

3c x 1.5mm - 6.0mm

4c x 1.5mm - 6.0mm

5c x 1.5mm - 6.0mm



PVC Reinforced Hose

specifications

Type Size:

1", 1-1/2", 1-1/4, 1/2"

2", 2-1/2", 3/4", 5/8"

Brand : Henpro

Transparant Hose

specifications

Type Size :

1/4" x 0.8mm x 50mm

3/8" x 1.0mm x 45mm

3/8" x 1.5mm x 50mm

1/2" x 1.5mm x 50mm

5/8" x 1.5mm x 50mm

3/4" x 3mm x 50mm

1" x 2mm x 50mm

1" x 3mm x 50mm

1-1/4" x 2.8mm x 40mm



RIDGID Plastic Clear Sheet



Welding Glove

specifications
Colour Type : Green
Packing : 6Dozen / Ctn
Brand : DeWeld



Fitter Hand Glove

specifications
Packing : 10Doz / Ctn



Argon Glove

specifications
Nitrile coating protects against
snags, punctures, abrasions
and cuts.



Polkadot Hand Glove



Cotton Hand Glove

specifications
Type Size : 400Gram - 850Gram
Packing : 12Pair / Doz, 50Doz/ Bag



Rubber Glove

specifications
Type : 12Pair / Doz
Colour : Red & Black



Signal Ball for Tug Boat

specifications
Colour : Black



Body Harness

specifications
Type : Single
Hook Double
Hook



Welding Apron

specifications
Features og leather glove :
Perfect finish
Comfortable material



Welding Sleeve



Safety belt



Safety Cable

specifications
Type Size : 2" x 20,5"



Rain Coat

specifications

Size: M, L, XL XXL



Wearpack

specifications

Type Size : S - XXL

Colour : Orange, Royal Blue,
Dark Blue, White



Safety Vest

specifications

Colour : Green , Orange



Welding Helmet - Proomax

specifications

The auto-darkening welding helmet
with Super Size Viewing area



Welding Head Shield

specifications

Application : For welders comfort,
& performance To protect the eyes,
face and neck from flash burn, sparks,
infrared light, and heat



Faceshield Yellow Set



Face Shield Visor

specifications

Type : Visor (Clear) , PVC (Bracket)



Safety Helmet

specifications

Colour :
White, Yellow, Grey
Blue, Red, Orange, Green



Ear Muff

specifications

Colour : Yellow



Safety Glasses Yellow Frame

specifications

Colour :
Safety Glasses Yellow Frame (Black , Clear)
Safety Glasses KY- 1152 (Black) , KY-1151 (Clear)



Safety Goggles

specifications

Direct Vent Safety Goggles
- Protect eyes from dust and debris, Adjustable.
- Fits over most prescription glasses, perforated sides for cooling air flow
Colour : Clear



Safety Rubber Boot

specifications

Colour : Yellow / Black
Type Size : 39- 44

Brand : Vistar



3M 1110 Disposable Corded Ear Plugs



3M Masker - Cartridge



Respirator - Cartridge

specifications
Respirator Type : NP305 - NP306
Cartridge Type : RC 201 - 209



Dust Mask N95



3M Scotch 23 - Rubber Splicing Tape



Bearing



Submersible Pump

specifications

Type Size :
2" / VT - 400
3" / VT - 800
5" / VT - 800

Brand : Yamada



Test Pump

specifications

Type Size :
150 - 100Bar

Brand : Kyowa



Cloth Tape

specifications

Size : 2"
Colour : Black, Blue, Yellow, Red



Safety Tape

specifications

Type Size : 2"
Colour :
Red & White, Yellow & Black



Aluminium Tape

specifications

Type Size : 2", 3", 4"



Transparant Tape or OPP Tape

specifications

Size : 2"



Masking Tape

specifications

Type Size :
1" x 10 Yard, 25Yard, 50Yard
2" x 10 Yard, 25Yard, 50Yard



Seal Tape

specifications

Type : 1/2" x 0.075mm x 10m



Hand Pump

Specifications

Size : 1" Rotary



Hydraulic Pipe Bender

Specifications

Pipe bender pipe rebar tube bender manual hand heavy duty, Handheld pipe bender , 2 in 1 dual size wheel pipe bending tool.



Bench Vice or Ragum

Specifications

Type Size : 6" & 8"



Pressure Sprayer

Specifications

Type Size : 5Liter , 7Liter, 15Liter



Oil Jug

Specifications

Type Size : 5 Liter



Tube Bender

Specifications

Type size :
12mm (1/2")
16mm (5/8")
3 in 1 (1/4" , 5/16" , 3/8")



Pipe Wrench

specifications

Type Size :

8", 12", 14", 18", 24", 36"



Bolt Cutter

specifications

Type Size :

12", 14", 18", 24", 36", 42"



Adjustable Spanner

specifications

Type : 6", 8", 12", 15", 18", 24"



Combination Spanner

specifications

Type Size :

(8-24mm) , (8-32mm),
(5-16" - 1") , (3/8" - 1-1/4")



Open End Wrench

specifications

Type Size :

- 6 X 7 mm
- 8 X 10 mm
- 12 X 14 mm
- 16 X 17 mm
- 8 X 9 mm
- 12 X 13 mm
- 14 X 15 mm
- 17 X 19 mm



Hacksaw Frame - Blade

specifications

Type Size :

Hacksaw Frame 12"
Hacksaw Blade 12"



Socket Set

specifications

Type Size :

Socket Set 1/2" 22Pcs 8-32MM



Box End Wrench

specifications

Type Size : 6mm - 32mm



Multi Cutter Mars

specifications

Type Size : (4") 100MM x 1.5MM x 40T
Brand : MARS



Allen Key Set

specifications

Type Size : 1.5MM-10MM (9Pcs)



Combination Plier

specifications

Type Size : 6", 8"



Cutting Plier

specifications

Type Size : 6", 8"



Long Nose Plier

specifications

Type Size : 6", 8"



Snap Ring Plier

specifications

Type: External & Internal



Tower pinger

specifications

Type Size : 8"
Brand : Revex



Crimping Tools

specifications

A Crimping tool is a device used to conjoin two piece of metal by deforming one or both of them to hold each other.



Locking Grip Plier

specifications

Type Size : 7", 10"



Hammer

specifications

Hammer Type Size :

1Kg - 5Kg

1Kg - (2Lbs)

2Kg (4Lbs)



Screw Driver

specifications

Type Size : 6", 8", 12" (+/-)

Stanley Screw Driver

6" x 150MM



Oil Filter Chain

specifications

The chain was made to be rust-proof due to the anti-rust oil on the surface. Making it work more smoothly and more durable.



Belt Filter Wrench

specifications

Type Size : 12", 16", 24"



Tiger Pruning Shears

specifications

Type : 702



Construction Ratchet Wrench

specifications

Type Size :

14mm x 17mm
12mm x 14mm
21mm x 23mm
17mm x 19mm



Slogging Wrench

specifications

Type Size : 27mm, 30mm,
32mm, 36mm, 41mm, 46mm



Tubing Cutters



Hand Tap SKC

specifications


Type Size : M4, M5, M6, M8,
M10, M12, M16, M18, M20
Brand : SKC



Hole Saw

specifications

Type Size : 16mm - 60mm

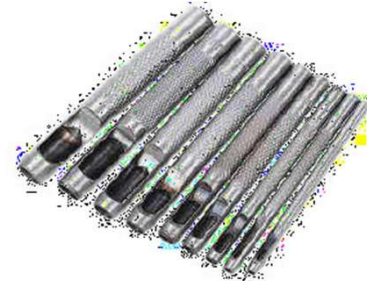

Hollow Hole punch

specifications

Type Size : 1MM - 22MM



Centre Punch

specifications

Type Centre Punch Size : 1/2" x 6"
Brand : REVEX



Drill Bit

specifications

Type Size : 10mm -30mm
Drill Bit Set :
1.0mm - 13.0mm
1.0mm - 10.0mm (9Pcs)



Tungsten Carbide Burr

specifications

Tungsten Carbide Burr
Type Size : C1020, F-1020, F-1225



Handle for Hand Tap

specifications

Handle for hand tap Type Size :
M4 - M12
M5 - M20 SKC
M6 - M20



Grease Gun

specifications

Packing : 10Pcs / Box



Silicon Gun



Torque Ratchet Wrench



T Type Wrench



Inspection Mirror



tarpaulin

specifications

Type Size : Canvas
Blue & White 1.8M x 25M



Air Coupler

specifications

Size : 10- 40
Type : SH SF SM SP
PH PF PM PP
Packing : 10Pcs / Box



Armature - Carbon Brush

specifications

Carbon Brush " HITACHI" Type
Size : 999-021, 038, 041, 043,
061, 088
- Other Brand and Size Available.



Crown Cold Galvanizing Zinc-Rich

Specifications

Type : Crown 7007 Brite Galvanise Coating 93% Zinch Rich Industrial type application such as aviation, Marine , Manufacturing, Etc.
Type : Crown 7008 Brite Galvanise Coating 65% Zinch Rich - Metallic Repair of weld, rims, metal chain fences, pipes, corrugated metal building , Etc

Brand: Crown



Water Finding Paste

Specifications

Brand : Kolor kut



Gasoline Gauging Paste

Specifications

Brand : Kolor kut



AVESTA Pickling Gel 122

Specifications

Features :
Restores damaged Stainless Steel surfaces, such as weld seams, by removing weld oxides, the underlying chromium depleted layer and other defects that may cause local corrosion



Spray Paint

specifications

Colour Type :
Black, White, Blue, Deep Green,
Grass Green, Lemon Yellow
Light Grey, Mahogany, Orange Red,
Orange Yellow, Signal Red, Silver,
Cream , Rose Pink



Red Silicone



Lem Dextone



Elbow

specifications

Material : Carbon Steel , Pipeline Steel
Pipe Size :1/2" -36" Seamless , 26-110"

Wall Thickness : SCH20 - 160SCH , Etc



Tee Joint

specifications

Material : Carbon Steel, Pipeline Steel
Type Size : 1/2" - 24"



Flange

specifications

Type : JIS 5K-20K Flanges
Size :1/2" -24"

Material : Brass , Carbon Steel



socket



Ball Valve Stainless Steel

specifications

Type Size : 1/2" - 4"

Material : Stainless Steel 304 / 316



Flange Ball Valve



Three Way Ball Valves

specifications

Size of Three Way Ball Valve : 1/4" - 2"

We export stainless steel and carbon steel three-way high platform ball valve with a full bore. It has been known that three-way ball valve are available in a variety of body materials and with all of the common end connections



Internal thread ball valve

specifications

These are internal thread ball valve, they can be divided heavy type ball valve, high platform ball valve, reduced bore ball valve.



Semi Rotary Hand Pump

specifications

Semi Rotary Hand Pump is suitable for the handling of clear and light liquids such as water, diesel and fuels, paraffin, light chemical solution and edible oil.



Reduced Bore Ball Valve

specifications

Size of Reduced Bore Internal Threaded Ball Valve: 1/4" - 2"



socket welded ball valve

specifications

Size of Socket welded Ball Valve :
1/4" - 2"



But welded End ball valve

specifications

Material : Stainless Steel



Brass Ball Valve

specifications

Size : 1/4" - 4"
Material : Brass



Mini Ball Valve female and Male Thread

specifications

Type Size : 1/4" - 4"
Material : Stainless Steel



Globe Valve

specifications

Material : Cast Iron, Bronze



Bronze Marine SDNR Globe Valve



Angle Globe Valve



swing check valve

specifications

Material : Bronze, cast Iron, Stainless Steel
Type : 1/2" - 14"



DIN Cast Steel Flanged End Globe Valve

specifications

Material : Bronze, Cast Iron, Stainless Steel
Flanged End : DIN & JIS
Type Size : 15mm - 300mm



bronze flanged sdnr globe valve

specifications

Material : Bronze , Cast Iron, Brass
Type Size :
2" - 12" Flanged Ends
1/4" - 4" Threaded Ends



bronze Marine SDNR Angle glove valve

specifications

Material : Bronze
Type Size : 1/2" - 3"



Gate Valve

specifications

Material : Brass, Cast Iron, Cast Steel
Size : 1/2" - 2"



Quick Open / Self-Closing Valve

specifications

Material : Bronze
Type Size : 1/4" - 2-1/2"



Self Closing Gate Valve

specifications

Material : Bronze
Type Size : 1/4" - 4"



Emergency Shut Off Valve

specifications

Type Size : 1/2" - 6"
Material : Cast Steel Body and Bronze
Application : used for marine pipelines of fresh water,
air or gas, fuel oil etc.



Brass foot valve

specifications

Material : Bronze
Type Size : 1", 1-1/2", 2", 2-1/2"
Material : 1-1/2" - 24"



Brass inline Spring check valve

specifications

Material : Bronze
Type Size : 1/2" - 3"



Self Closing Gate Valve

specifications

Type Size : 1/4" - 2-1/2"
Material : Bronze, Stainless Steel



Safety Quick Relief Valve

specifications

Safety Quick Relief Valve Type Size : 3/4"
Material : Bronze, Iron, Stainless Steel



Fire Hydrant Valve Angle Type Instantaneous

specifications

Material : Bronze



Deck Stand and Universal Joint

specifications

Material : Cast Iron, Stainless Steel
Size : DN25 -DN40



Level GAUGE-FLAT TYPE



LEVEL GAUGE-ACRYLIC PIPE

specifications

Type Size : 1/2" x 1/2"
Material : Bronze



Air Vent Head

specifications

Material : Cast Iron
Port Size : DN50-500

marine vacuum relief valve

Specifications

Material : Type HS high velocity vacuum pressure relief vent, automatically controls the tank pressure / vacuum , during loading and ballasting without manual operation



Fire Hose



Double Stem Wafer Butterfly Valve

specifications
Material : 1-1/2" - 24"



Worm Gear Operated Butterfly Valve



Stainless Steel Butterfly Valve



Y- Strainer

specifications

"Y" Type Strainer are generally used where the need for cleaning is infrequent.

Material : Bronze , Iron , Cast Steel, Stainless Steel

Type Size : 1/4" - 12"



Duplex Strainer Flanged

specifications

Material : Bronze , Iron, Steel

Duplex Strainer are used where uninterrupted service is necessary and the system cannot be shut down to clean the stainer.



mud boxes

specifications

Type Size : 2" - 2-1/2"

Material : Cast Iron



fuel oilsimplex



bucket-stainer



Sight Glass with flange



Sight Glass

Jig Saw

Specifications

Type :

CJ160V 160mm (6-19/64")
CJ160VA 160mm (6-19/64")
CJ90VAST 90mm (3-1/2")
CJ65V3 65mm (2-5/8")
CJ90VST 90mm (3-1/2")
CJ110MV 110mm (4-5/16")
CJ110MVA 110mm (4-5/16")



Cutt Off Machine

Specifications

Type :

CC14ST 355mm (14")
CC14SF 355mm (14")
CC16SA 405mm (16")
Soft grip handle



Cutter

Specifications

Type :

CM4ST 110mm (4-3/8")
CM4SB2 110mm (4-3/8")
CM5SB 125mm (5")
CM9SR 230mm (9")
CM9UBY 230mm (9")

Brand : Hikoki



Disc Cutter

Specifications

Type :

CM12Y 305mm (12")
Brand : Hikoki



PT. LINTAS SAGARA BIRU



**Dreamland 2 Blok E7 No. 8
Marina City**



+6282173727110 / +6281272584320



yusmarlina.palmazelsa@gmail.com